


FIG. 1

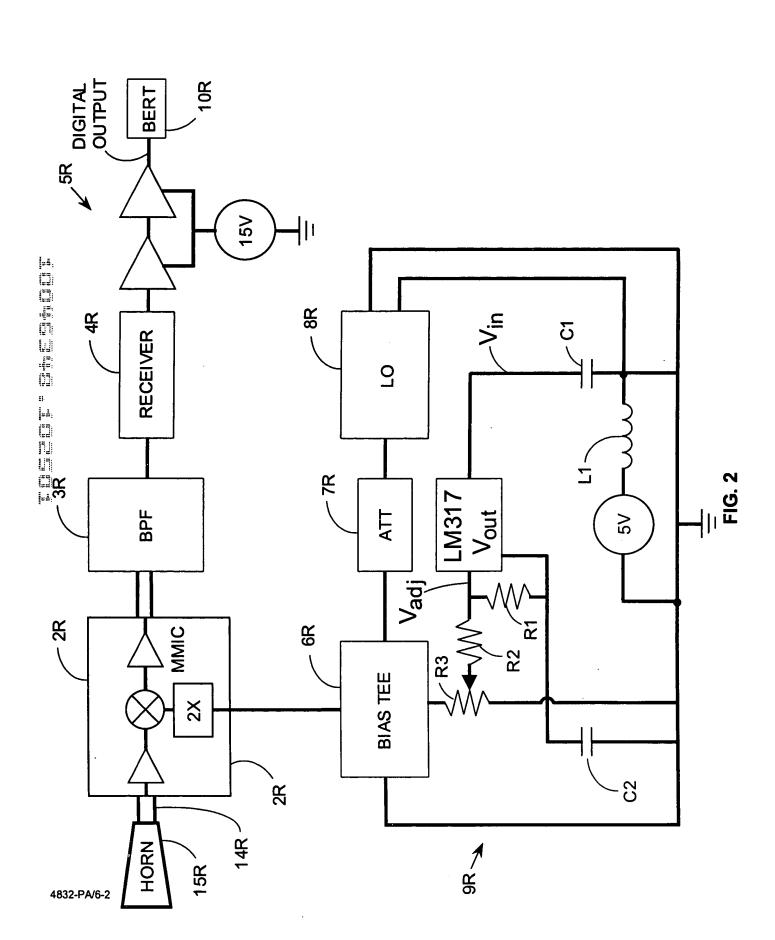

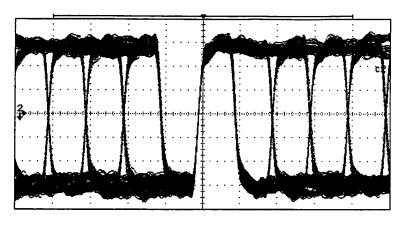

-24.000 ns 1.000 ns 26.000 ns 5.00 ns/div Real time 2 200 mV/ 0.00000 V
RECEIVER SIGNAL FROM BERT 200

FIG. 3

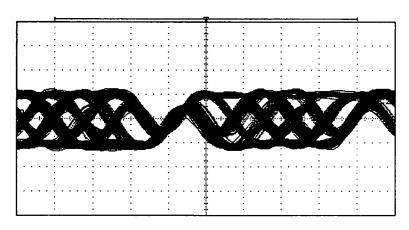

-4.000 ns 1.000 ns 6.000 ns 1.00 ns/div Real time 2 500 mV/ 0.00000 V

RECEIVER SIGNAL FROM BERT 200

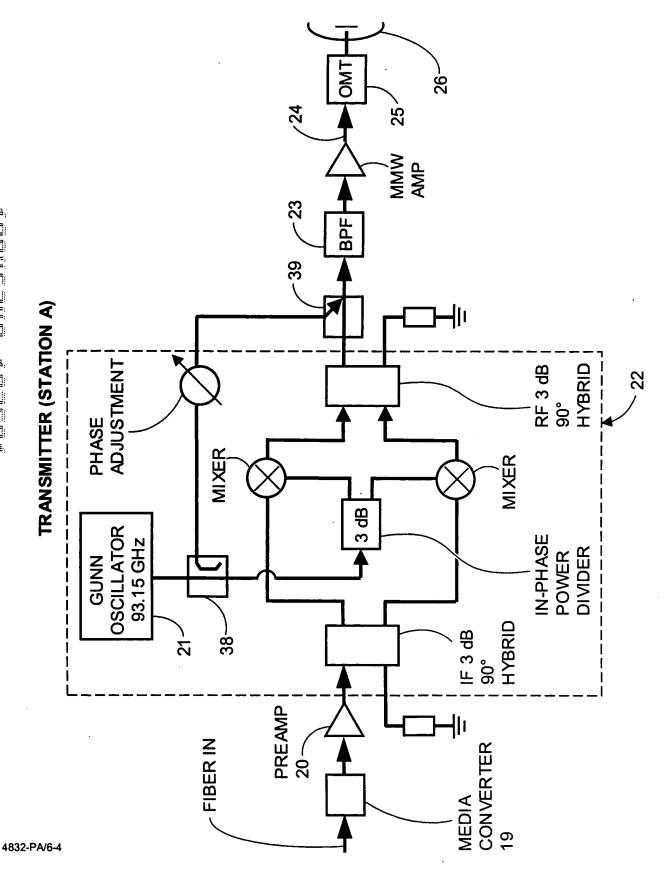
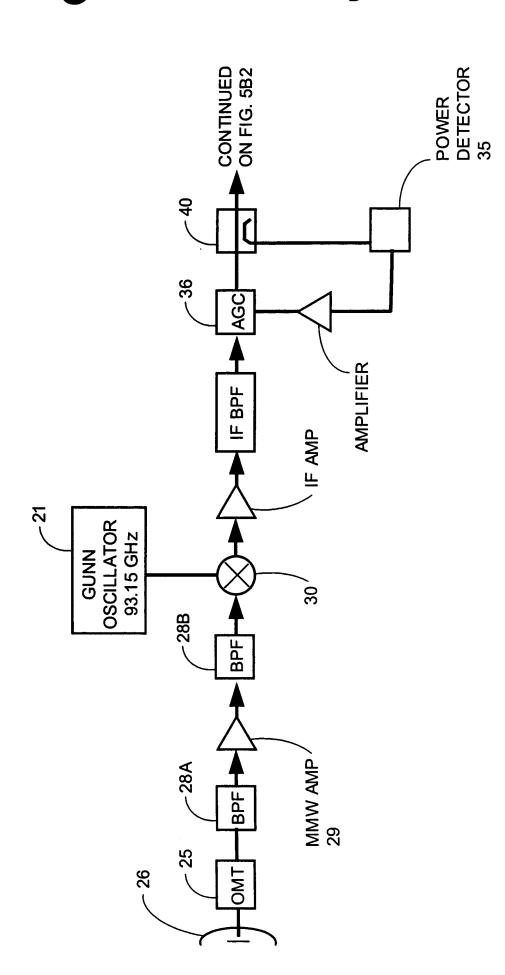
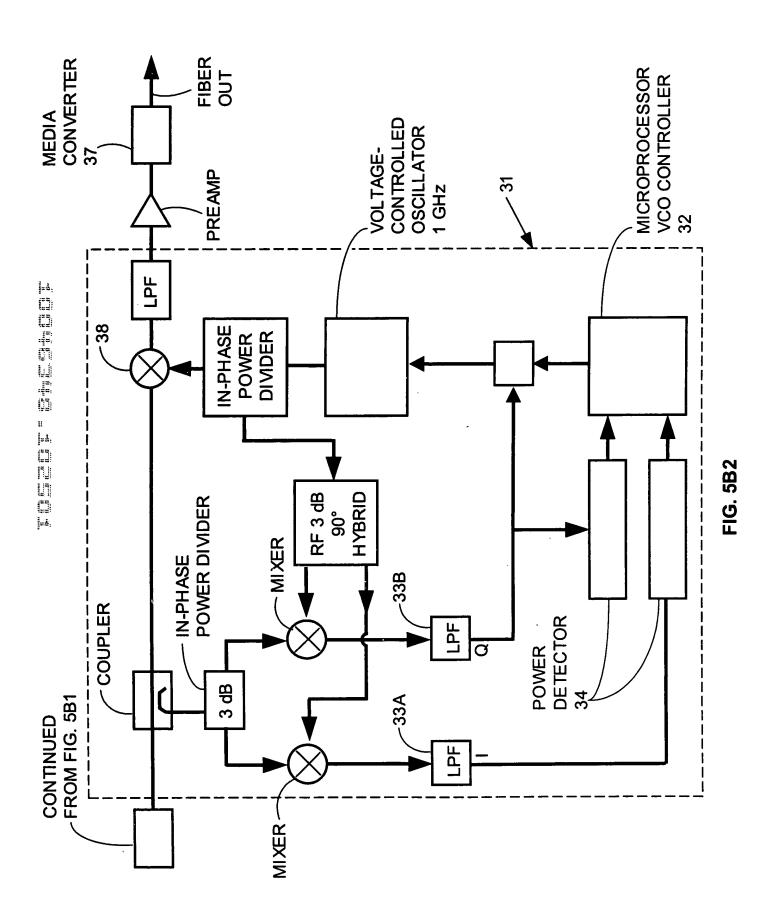


FIG. 5A

RECEIVER (STATION A)







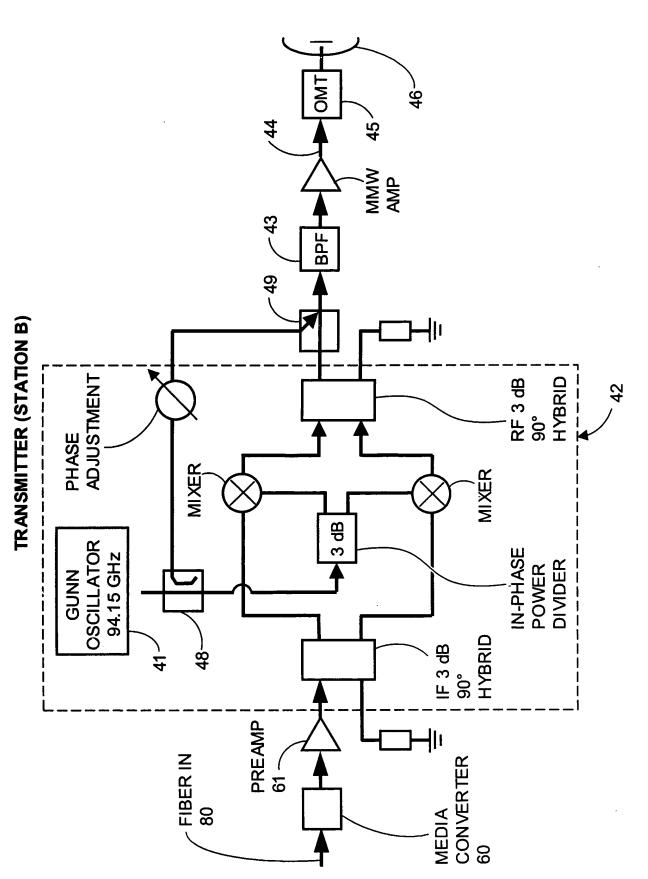


FIG. 6A


RECEIVER (STATION B)

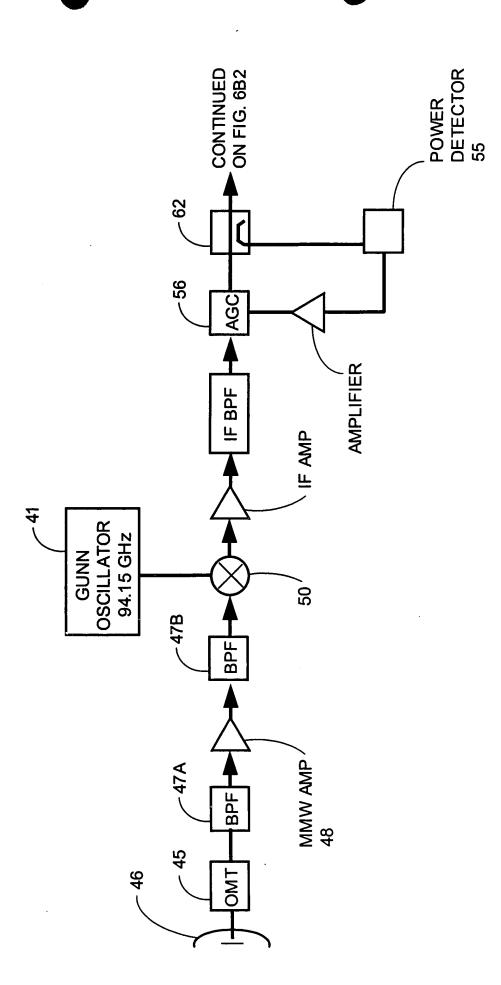

4832-PA/6-8

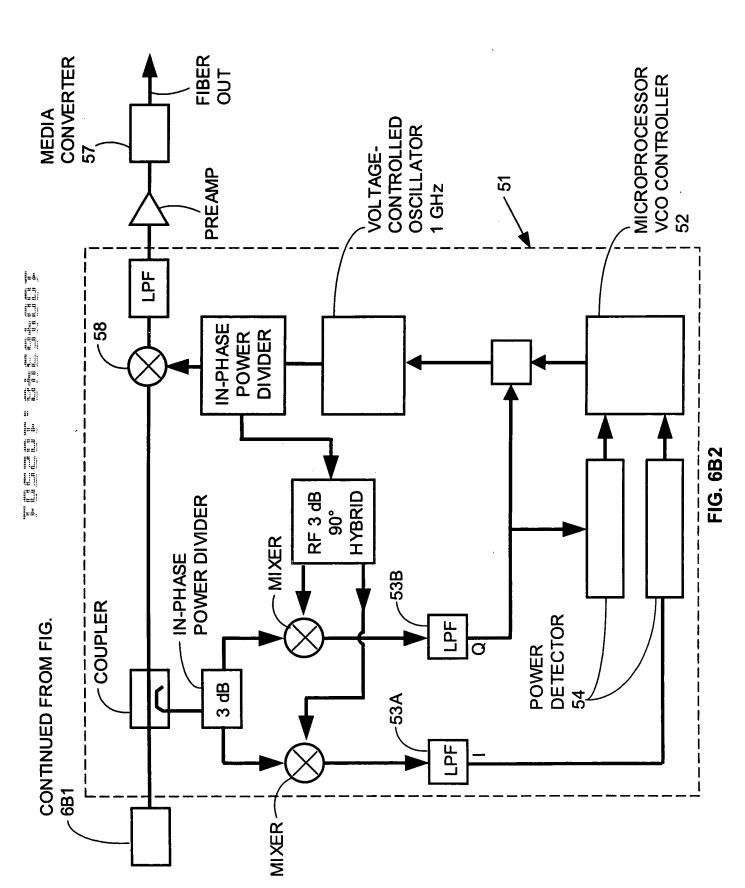

SPECTRUM PLANNING DIAGRAMS (STATION A)

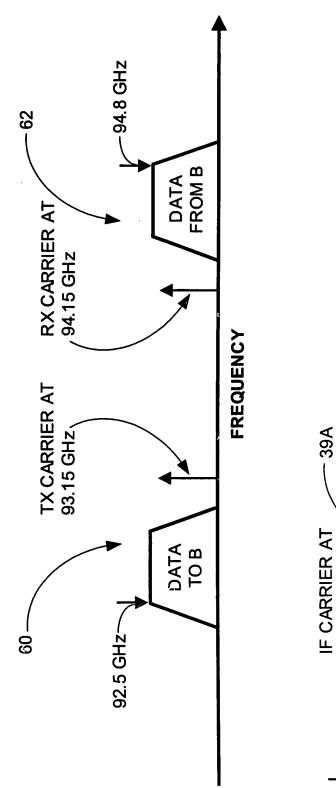

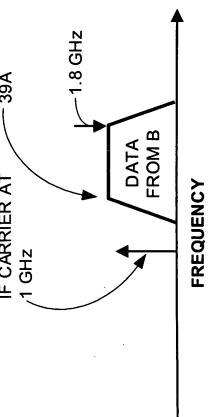
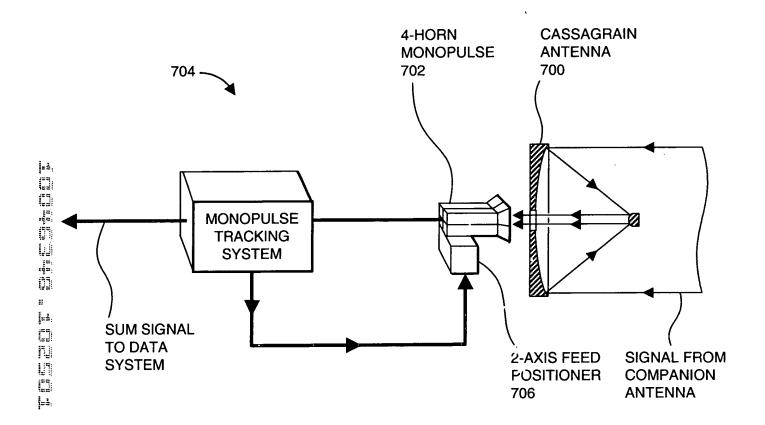
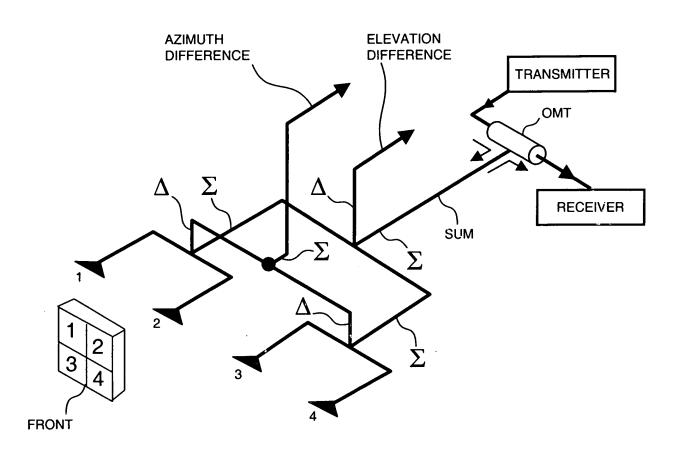


FIG. 7A





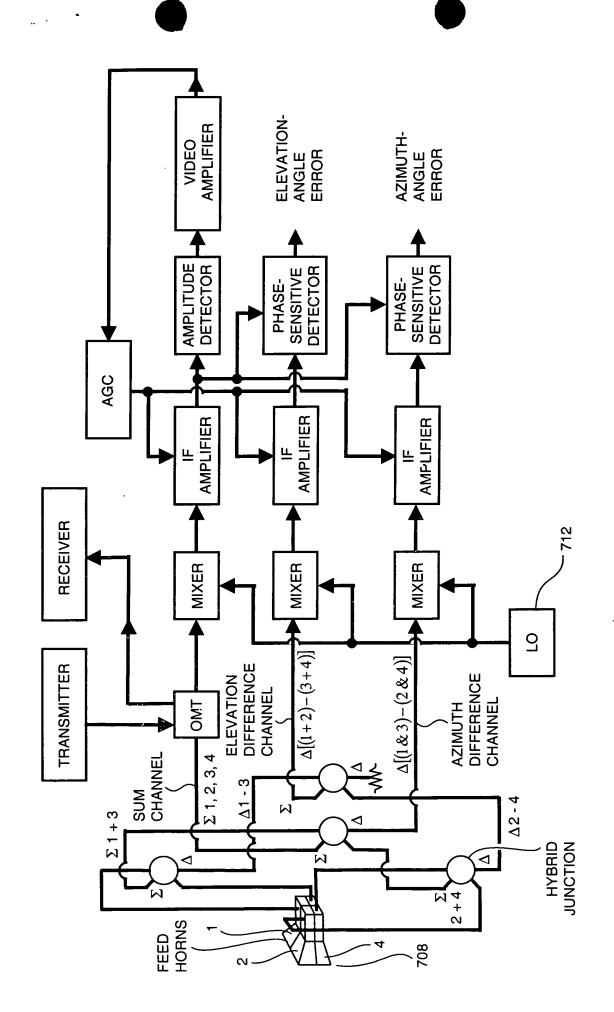


FIG. 11